

Product Data Sheet 8850 TV

**ebmpapst**

The engineer's choice



**8850 TV**

**INDEX**

|          |                                 |          |
|----------|---------------------------------|----------|
| <b>1</b> | <b>General</b> .....            | <b>3</b> |
| <b>2</b> | <b>Mechanics</b> .....          | <b>3</b> |
| 2.1      | GENERAL .....                   | 3        |
| 2.2      | CONNECTIONS .....               | 4        |
| <b>3</b> | <b>Operating Data</b> .....     | <b>5</b> |
| 3.1      | ELECTRICAL OPERATING DATA ..... | 5        |
| 3.2      | ELECTRICAL FEATURES .....       | 6        |
| 3.3      | AERODYNAMICS .....              | 6        |
| 3.4      | SOUND DATA .....                | 7        |
| <b>4</b> | <b>Environment</b> .....        | <b>8</b> |
| 4.1      | GENERAL .....                   | 8        |
| 4.2      | CLIMATIC REQUIREMENTS*) .....   | 8        |
| <b>5</b> | <b>Safety</b> .....             | <b>8</b> |
| 5.1      | ELECTRICAL SAFETY .....         | 8        |
| 5.2      | APPROVAL TESTS .....            | 9        |
| <b>6</b> | <b>Reliability</b> .....        | <b>9</b> |
| 6.1      | GENERAL .....                   | 9        |

## 1 General

|                                     |                          |
|-------------------------------------|--------------------------|
| Fan type                            | Fan without chassis      |
| Rotating direction looking at rotor | Clockwise                |
| Airflow direction                   | Air outlet over traverse |
| Bearing system                      | Sleeve bearing           |
| Mounting position - shaft           | Any                      |
| Balancing grade                     | 2,5                      |


## 2 Mechanics

### 2.1 General

|                   |          |  |
|-------------------|----------|--|
| Width             | 0,0 mm   |  |
| Height            | 0,0 mm   |  |
| Depth             | 37,0 mm  |  |
| Diameter          | 76,0 mm  |  |
| Mass              | 0,370 kg |  |
| Housing material  |          |  |
| Impeller material | Metal    |  |

## 2.2 Connections

|                       |              |  |
|-----------------------|--------------|--|
| Electrical connection | Wires        |  |
| Lead wire length      | L = 325,0 mm |  |
| Tolerance             | +/- 10,0 mm  |  |
| Tube length           | See drawing  |  |
| Tolerance             |              |  |
| Wire size (AWG)       | 18           |  |
| Insulation diameter   | 2,20 mm      |  |
| Plug                  | See drawing  |  |
| Contact               | See drawing  |  |

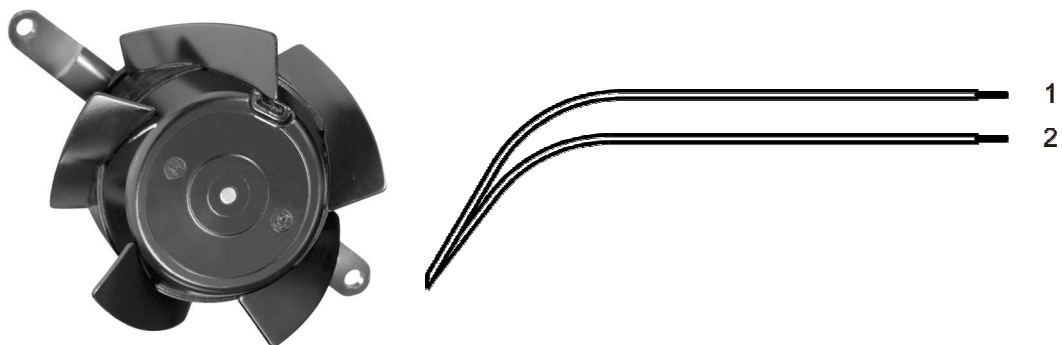

|   | Color | Operation |
|---|-------|-----------|
| 1 | black | L         |
| 2 | black | N         |

### **3 Operating Data**

#### **3.1 Electrical Operating Data**

For checking purposes the electrical data can be specified without an intake nozzle / aperture plate as well. For this the data have to defined by the appropriate quality assurance.

**Electrical Operating Data with Intake Nozzle (for testing purposes)**

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).  
In the intake and outlet area should not be any solid obstruction within 0,5 m.


|  |                                 |
|--|---------------------------------|
| Measurement setup:                                     | Measured with an aperture plate |
| Aperture plate diameter:                               | 76,5 mm                         |
| Distance between mounting traverse and aperture plate: | 17 mm                           |

$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
I: corresp. to RMS line current

| Features          | Condition      | Symbol | Values       |              |
|-------------------|----------------|--------|--------------|--------------|
|                   |                |        | 50 Hz        | 60 Hz        |
| Frequency         | $\Delta p = 0$ | f      | 50 Hz        | 60 Hz        |
| Nominal voltage   | $\Delta p = 0$ | $U_N$  | 230 V        | 230 V        |
| Tolerance         |                |        | + 6 % - 10 % | + 6 % - 10 % |
| Power consumption | $\Delta p = 0$ | P      | 12,5 W       | 11 W         |
| Tolerance         |                |        | + 5 % - 10 % | + 5 % - 10 % |
| Speed             | $\Delta p = 0$ | n      | 2.100 1/min  | 2.450 1/min  |
| Tolerance         |                |        | +- 5 %       | +- 5 %       |

**3.2 Electrical Features**

|                         |           |
|-------------------------|-----------|
| Locked rotor protection | Impedance |
| Locked rotor current at |           |

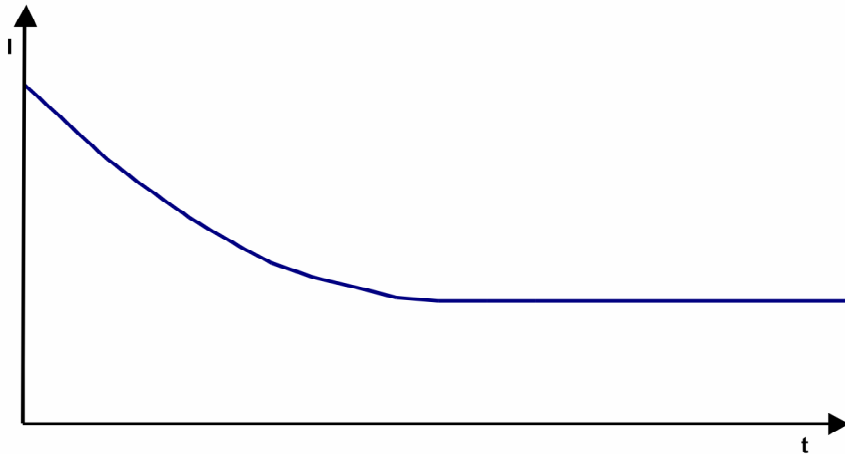

**3.3 Aerodynamics**

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.  
The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the



**4 Environment**

**4.1 General**

|  |                                  |  |
|--|----------------------------------|--|
| Min. permitted ambient temperature TU min. | -10 °C / 50 Hz<br>-10 °C / 60 Hz |  |
| Max. permitted ambient temperature TU max. | 70 °C / 50 Hz<br>70 °C / 60 Hz   |  |
| Min. permitted storage temperature TL min. | -40 °C                           |  |
| Max. permitted storage temperature TL max. | 80 °C                            |  |

**4.2 Climatic Requirements \*)**

|                       |   |  |
|-----------------------|---|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days |  |
| Water exposure        | None  |  |
| Dust requirements     | None  |  |
| Salt fog requirements | None  |  |

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

**5 Safety**

**5.1 Electrical Safety**

|   |  |
|---|--|
| Dielectric strength<br>DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700)<br>A.) Type test<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C.<br>No arcing or breakdown is allowed!<br>All connections together to ground.<br>B.) Routine test<br>Measuring conditions: At indoor climate.<br>No arcing or breakdown is allowed!<br>All connections together to ground. | 1500 VAC / 1 Min.<br><br>1500 VAC / 1 Sec. |
| Isolation resistance<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.  | RI > 50 MOhm                               |
| Clearance / creepage distance   | 2,0 mm / 1,8 mm                            |
| Protection class  | I  |



## 5.2 Approval Tests

|     |   |   |
|-----|---|---|
| CE  | EC Declaration of Conformity  | Yes   |
| EAC | Eurasian Conformity   | Yes   |
| UL  | Underwriters Laboratories   | Yes / UL507, Electric Fans  |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association                                      | Yes / C22.2 No. 113 Fans and Ventilators                                      |
| CCC | China Compulsory Certification                                      | Yes / GB 12350 Safety Requirements for small Power Motors                     |

The approval tests are observed to:

U approval max.: 230 V / f: 50 and 60 Hz @ TU approval max.: 70 °C


## 6 Reliability

### 6.1 General

|                                   |                                      |  |
|-----------------------------------|--------------------------------------|--|
| Life expectancy L10 at TU = 40 °C | 52.500 h / 50 Hz<br>55.000 h / 60 Hz |  |
| Life expectancy L10 at TU max.    | 25.000 h / 50 Hz<br>27.500 h / 60 Hz |  |

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN 34, beachten

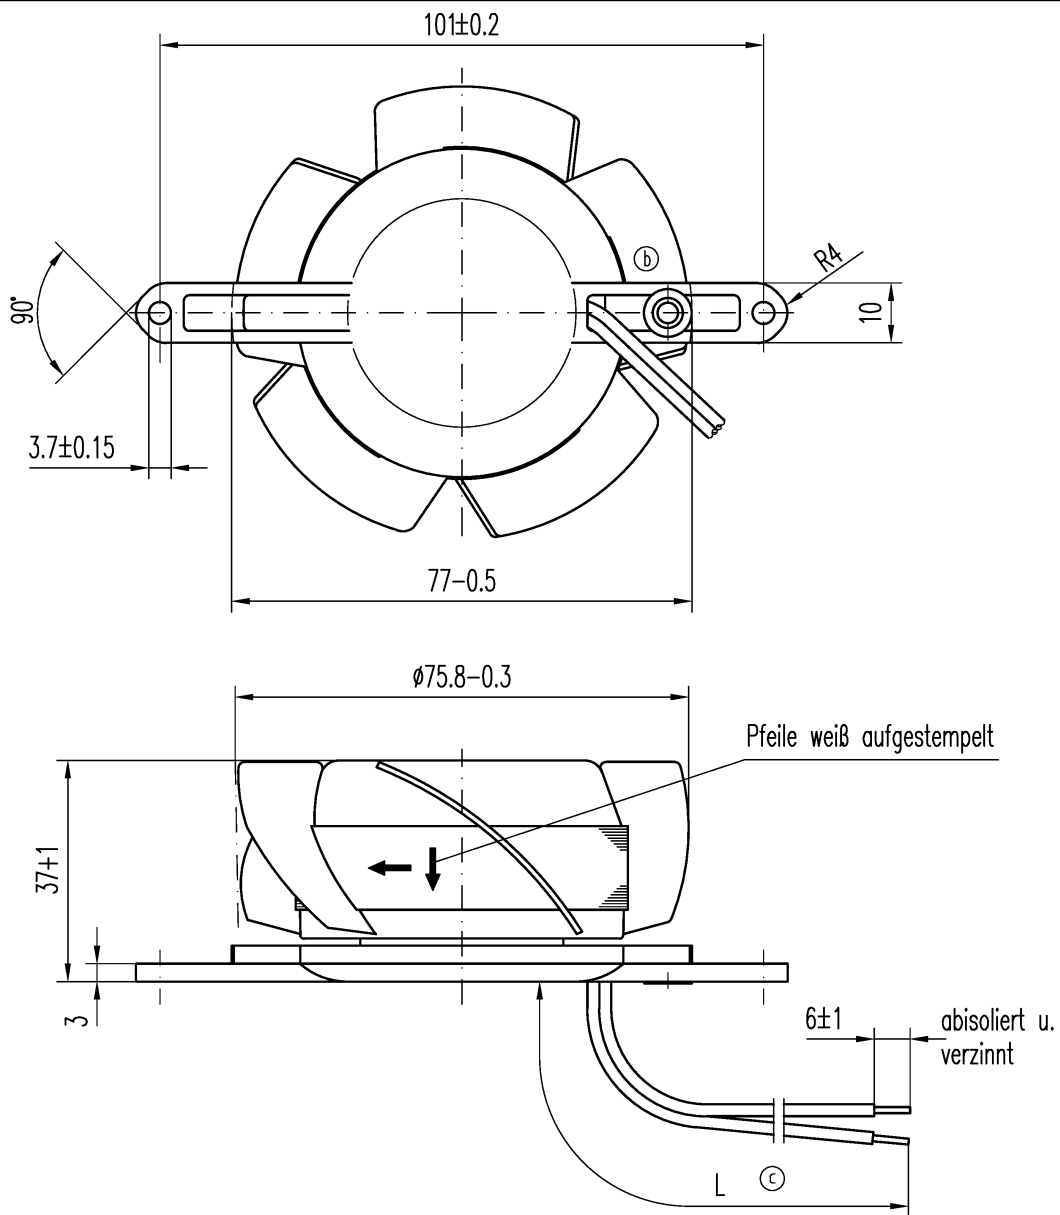

Axialspiel bei  
 Kugellagerung (K) : 0 (mit Federausgleich)  
 Gleitlagerung (G) : 0.1 - 0.6

Ⓒ

Anzahl und Länge  
 der Litze s. Bv Bl.1

|      |   |          |          |              |   |         |
|------|---|----------|----------|--------------|---|---------|
| 319x | Tolerierung: DIN 7167                   |          |          |              |   |         |
| 083  | Allgemeintoleranzen: DIN ISO 2768-c     |          |          |              |   |         |
| 210  |   |          | Datum    | Name         | Artikel   | Maßstab |
| 232  |   |          | Erstellt |              |   |         |
| 235  |   |          | Geprüft  |              |   |         |
| 240  | c                                       |          |          |              | Zchg.-Nr.   | Blatt   |
| 243  | Index                                   | Änd.-Nr. | Datum    | Geändert von | <b>PAPST</b><br>PAPST-MOTOREN GmbH & Co KG<br>D-78112 St.Georgen<br>Germany | Blatt   |
| 516  | Zur Verwendung im Verteiler freigegeben |          |          |              |   |         |
|      | von                                     |          | am       |              |   |         |