

Product Data Sheet 6448/2TDHHPR

**ebmpapst**

The engineer's choice



6448/2TDHHPR

INDEX

<b>1</b>	<b>General</b> .....	<b>3</b>
<b>2</b>	<b>Mechanics</b> .....	<b>3</b>
2.1	General.....	3
2.2	Connections.....	3
<b>3</b>	<b>Operating Data</b> .....	<b>4</b>
3.1	Electrical Interface - Input.....	4
3.2	Electrical Operating Data .....	5
3.3	Electrical Interface - Output.....	6
3.4	Electrical Features .....	6
3.5	Data According ErP Directive .....	7
3.6	Aerodynamics.....	8
3.7	Sound Data.....	10
<b>4</b>	<b>Environment</b> .....	<b>10</b>
4.1	General.....	10
4.2	Climatic Requirements .....	10
<b>5</b>	<b>Safety</b> .....	<b>11</b>
5.1	Electrical Safety .....	11
5.2	Approval Tests.....	11
<b>6</b>	<b>Reliability</b> .....	<b>11</b>
6.1	General.....	11

## 1 General

Fan type	Fan	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


## 2 Mechanics

### 2.1 General

Width	150,0 mm	
Depth	51,0 mm	
Diameter	172,0 mm	
Mass	0,780 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 260 Ncm Remaining corners: 260 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

### 2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 365 mm	
Tolerance	+ - 10,0 mm	
Tube length	S = 15 mm	
Tolerance	+ - 5,0 mm	

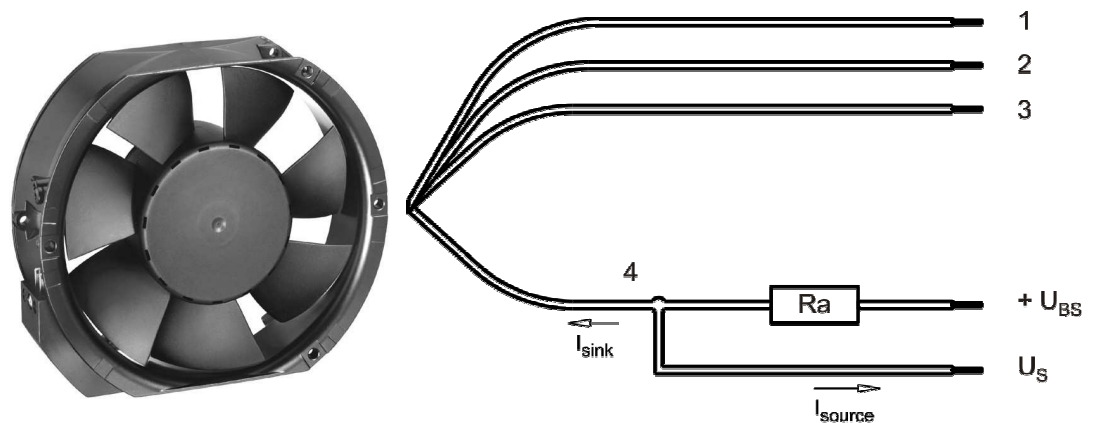

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 22	1,7 mm
2	blue	- GND	AWG 22	1,7 mm
3	violet	PWM	AWG 22	1,7 mm
4	white	Tacho	AWG 22	1,7 mm

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.



### 3 Operating Data

#### 3.1 Electrical Interface - Input

Control input	PWM
---------------	-----

#### Features

Input type	Open collector	
PWM - Frequency		typical: 2 kHz

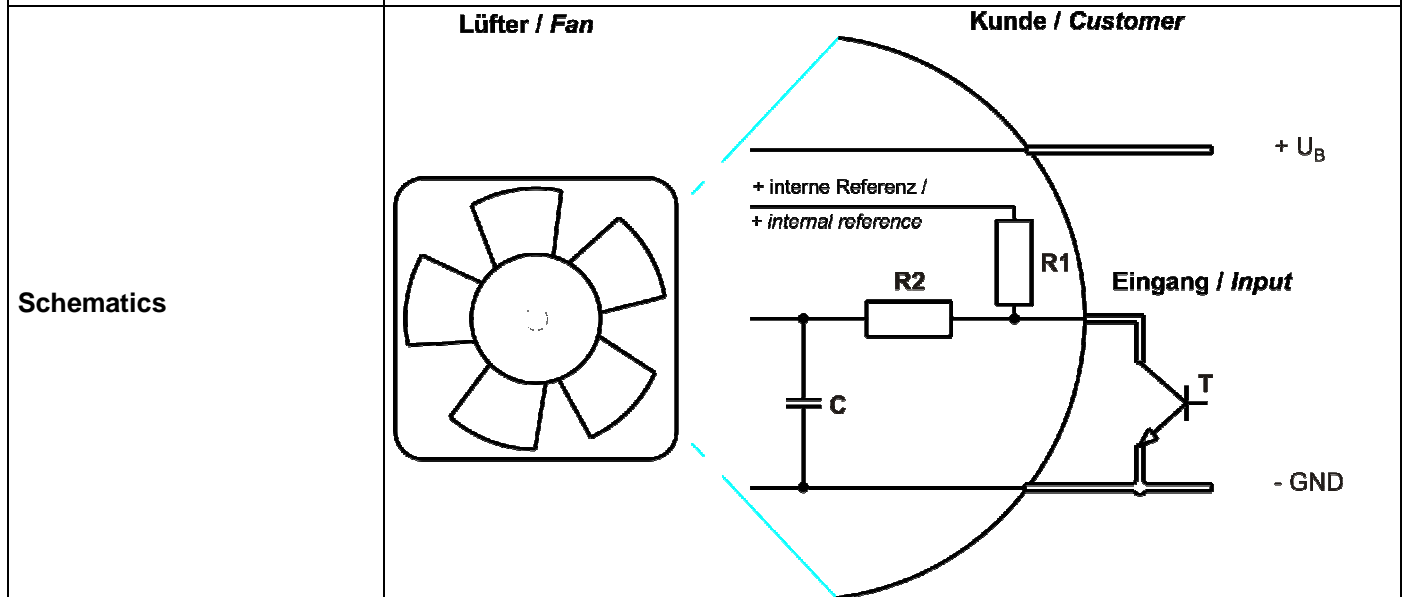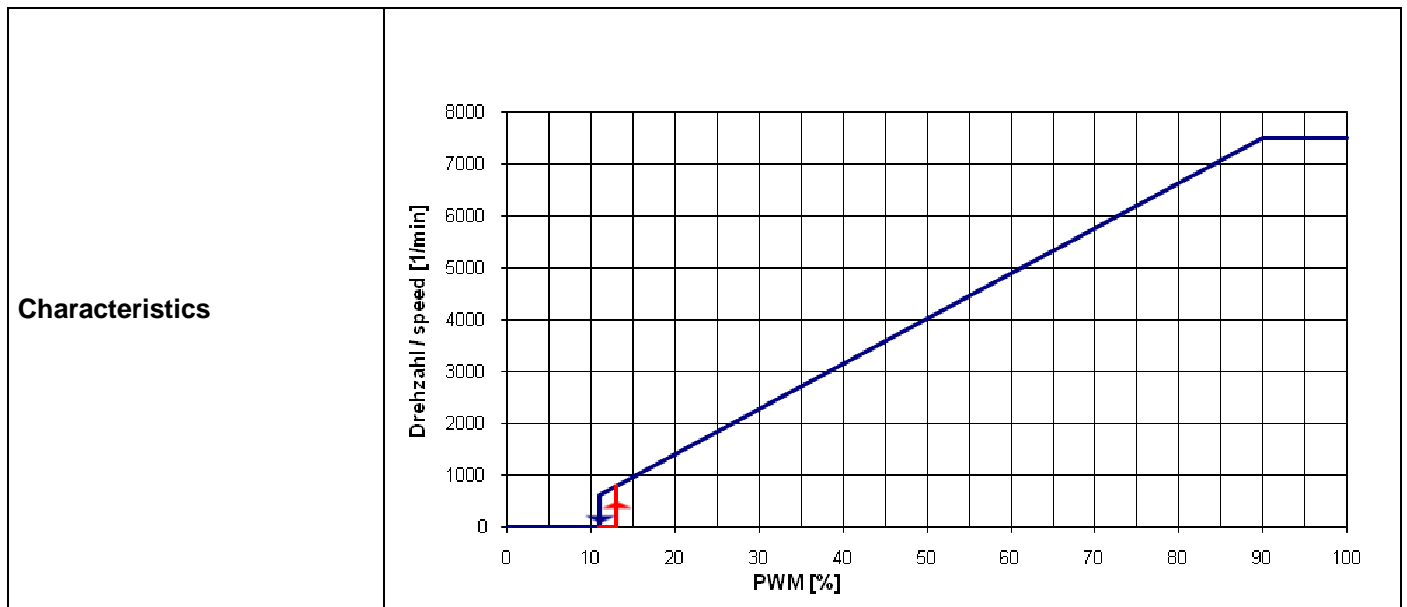

PWM input transistor requirements:  
 $U_{CEmax.} \Rightarrow 12\text{ V}$ ;  $I_{Sink\ max.} > 5\text{ mA}$ ;  $U_{CEsat.} < 0,15\text{ V}$

**Speed control:**

By Puls width modulation (PWM) 0 ... 100%

Open collector in relation to signal-ground  
 f = 2kHz +-20%

**Information to the curve:**

0% - <=12% PWM: 0 1/min  
 13% - 90% PWM: linear increasing curve  
 90% - 100% PWM: 7.500 1/min (corresponding to max. speed)  
 13% PWM: 800 1/min (Fan on, comming from 0% PWM)  
 11% PWM: 600 1/min or 0 1/min (Fan off, comming from 100% PWM)

**3.2 Electrical Operating Data**

Measurement conditions: Normal air density = 1,2 kg/m3; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
 I: corresp. to arithm. mean current value

Name	Condition
PWM 0001	PWM: 100 %;

\*\*)

**To note inrush current @ U nom:**

The internal electrolytic capacitor 220uF/75V has inrush current limitation, the existing peak depends on ceramic capacitor 100nF.

Features	Condition	Symbol	Values		
Voltage range		U	36 V		72 V
Nominal voltage		$U_N$		48 V	
Power consumption	$\Delta p = 0$	P	162 W	160 W	169,2 W
Tolerance	PWM 0010		+/- 15 %	+/- 15 %	+/- 15 %
Current consumption	$\Delta p = 0$	I	4.500 mA	3.300 mA	2.350 mA
Tolerance	PWM 0010		+/- 15 %	+/- 15 %	+/- 15 %
Speed	$\Delta p = 0$	n	7.500 1/min	7.500 1/min	7.500 1/min
Tolerance	PWM 0010		+/- 10 %	+/- 10 %	+/- 10 %

### 3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------




Features	Note	Values
Tacho operating voltage	$U_{BS}$	$\leq 60\text{ V}$
Tacho signal Low	$U_{S\ low}$	$\leq 0,4\text{ V}$
Tacho signal High	$U_{S\ high}$	
Maximum sink current	$I_{sink}$	$\leq 20\text{ mA}$
External resistor	External resistor $R_a$ from $U_{BS}$ to $U_S$ required. All voltages measured to GND.	
Tacho frequency	$(2 \times n) / 60$	
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5\text{ V/us}$

$n$  = revolutions per minute (1/min)

### 3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	P-CH FET	
Max. residual current at $U_N$	$I_F \leq 20$	
Locked rotor protection	Auto restart	
Locked rotor current at $U_N$	$I_{block}$	
Clock signal at locked rotor	$t_3 / t_4$ typical: 0,5 s / 10,0 s	

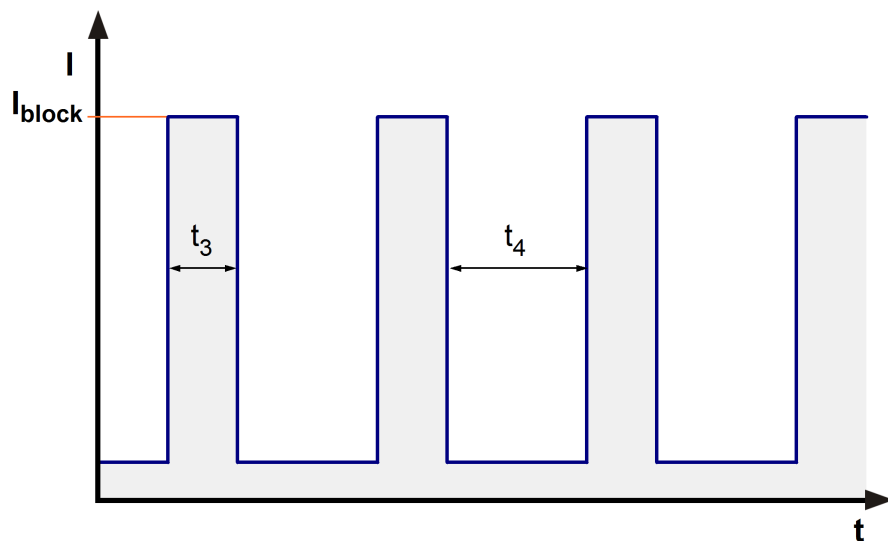**Internal Fuse:**

Littlefuse NANO2(R) FUSE; Very fast acting 451 Series; 7 A (Art.-Nr.: 451007)

**3.5 Data According ErP Directive**

Installation / Efficiency category	A / static
Speed control	integrated
Specific ratio	1,00398
Target overall efficiency 2015	29,2 %
Overall efficiency	37,5 %
Efficiency grade	40
Power input	198,7 W
Speed	7.480 1/min

All values measured in optimum energy efficiency point.

Productiondatecode is printed on the fan label.


### 3.6 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
 Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
 In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.  
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

7.500 1/min at free air flow	PWM 100 %;		
Max. free-air flow ( $\Delta p = 0 / \dot{V} = \max.$ )		900,0 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \max. / \dot{V} = 0$ )		740 Pa	



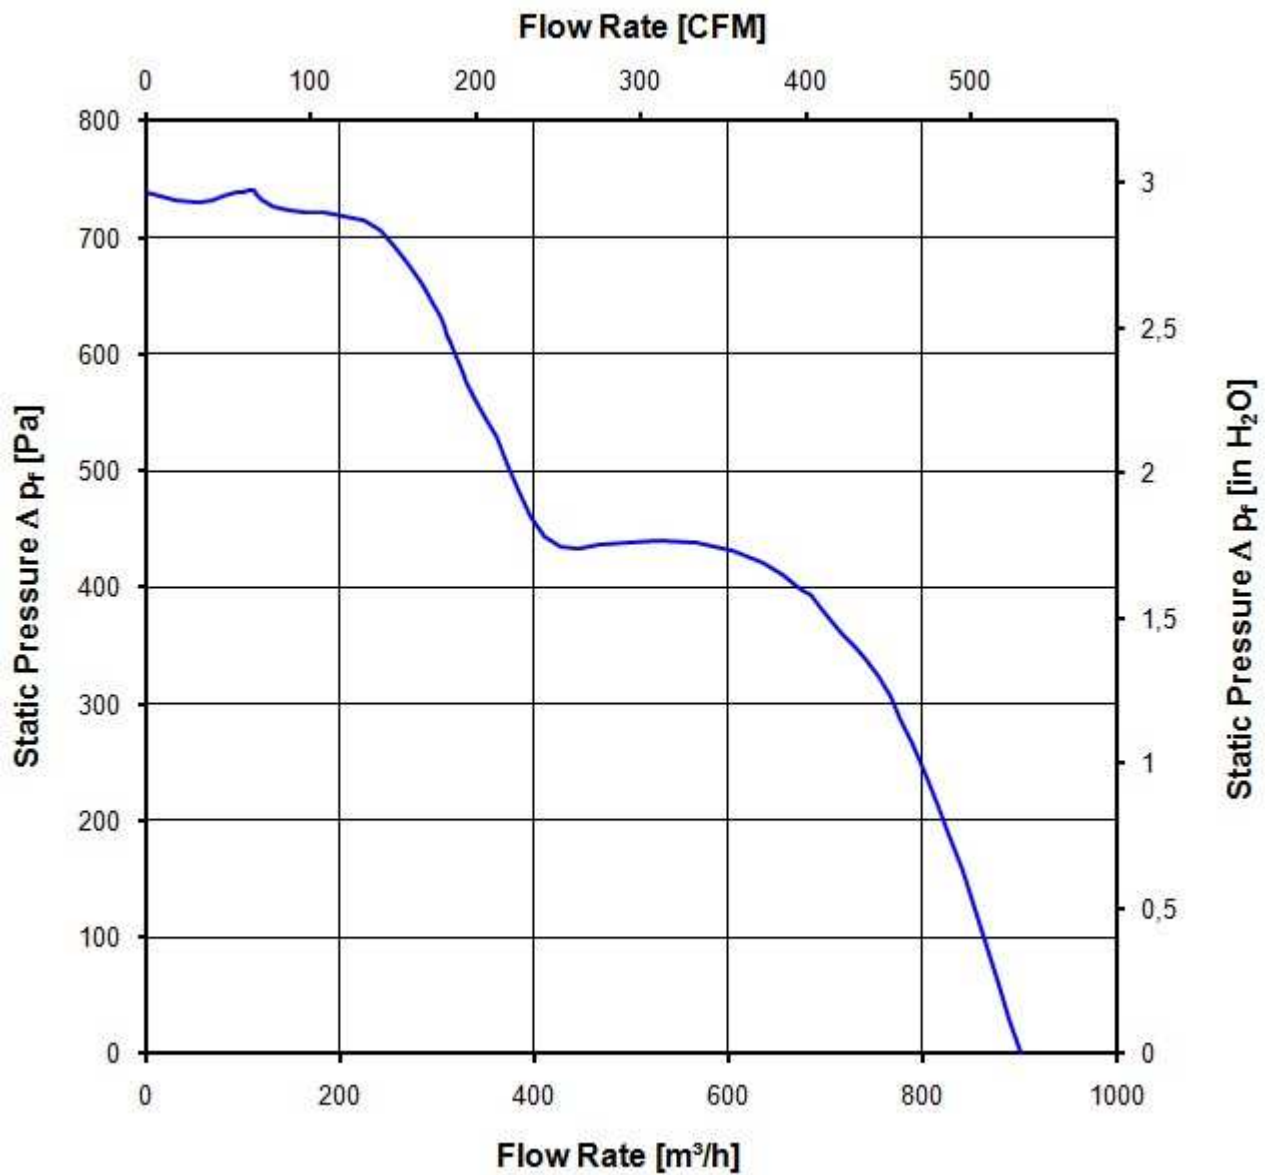

### 3.7 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB}(A)$   
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

7.500 1/min at free air flow	PWM 100 %;		
------------------------------	------------	--	--

Optimal operating point	655,0 m <sup>3</sup> /h @ 362 Pa	
Sound power level at the optimal operating point	8,7 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	80,0 dB(A)	

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	60 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

### 4.2 Climatic Requirements

Humidity requirements	humid heat, cyclic; according to DIN EN 60068-2-30, 6 cycle	
Water exposure	None	
Dust requirements	Dust check; according to DIN EN 60068-2-68, 6g/m <sup>2</sup> d, 1 day	
Salt fog requirements	None	

Permitted application area:

The product is for the use in sheltered rooms with limited controlled temperature. Occasionally condensed water is allowed. Direct exposure to water must be avoided. Saline ambient conditions must be avoided.

Pollution degree 2 (according DIN EN 60664-1)

It occurs only non-conductive pollution. Occasionally, temporary conductivity caused by condensation occurs.

Please require severity levels and specification parameters from the responsible development departments.

**5 Safety**

**5.1 Electrical Safety**

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	1000 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1700 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	I	

**5.2 Approval Tests**

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

The approval tests are observed to:

U approval max.: 72,0 V @ TU approval max.: 65,0 °C



**6 Reliability**

**6.1 General**

Life expectancy L10 at TU = 40 °C	70.000 h	
Life expectancy L10 at TU max.	45.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	117. 500 h	

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzmerk nach DIN ISO 1676 beachten / Refer to protection notice DIN ISO 1676

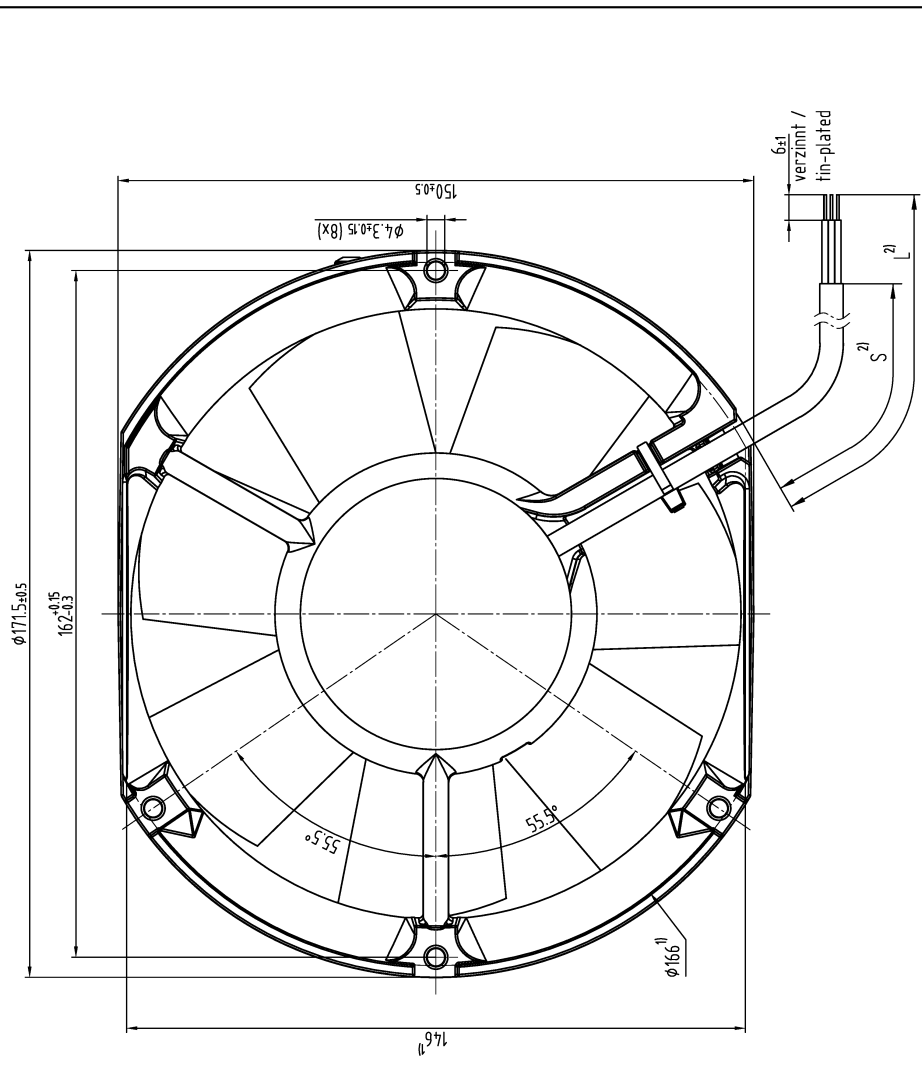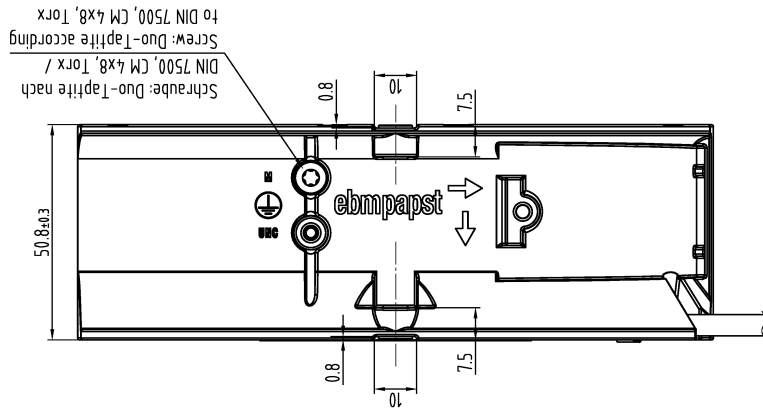

- 1) = Maße für Montageausschnitt / Dimensions for assembly wall.
- 2) = Anzahl und Länge von Litzen und Schlauch siehe Produktspezifikation / Length an number of wires and tube see product specification.
- Axialspiel: mit Feder spielfrei verspannt / Without axial clearance by a pre-loaded spring

SW-Stand/Date	Best.-Nr./Order No.	Werkstoff/Material	Volumen/Volume (mm <sup>3</sup> )
		ebmpapst	Gewicht/Mass (g)
		Art./Item/Title	
CAD-Implementierung / Name/Name			
Anzahl/Symbole / Quantity/Symbols			
Bearb./ Mach./ Process/ Finish/ Release			
Toleranz/Tolerances: H7/g6 H8/g7 H9/g8 H10/g9 H11/d9 H12/d10 H13/d11 H14/d12 H15/d13 H16/d14 H17/d15 H18/d16 H19/d17 H20/d18 H21/d19 H22/d20 H23/d21 H24/d22 H25/d23 H26/d24 H27/d25 H28/d26 H29/d27 H30/d28 H31/d29 H32/d30 H33/d31 H34/d32 H35/d33 H36/d34 H37/d35 H38/d36 H39/d37 H40/d38 H41/d39 H42/d40 H43/d41 H44/d42 H45/d43 H46/d44 H47/d45 H48/d46 H49/d47 H50/d48 H51/d49 H52/d50 H53/d51 H54/d52 H55/d53 H56/d54 H57/d55 H58/d56 H59/d57 H60/d58 H61/d59 H62/d60 H63/d61 H64/d62 H65/d63 H66/d64 H67/d65 H68/d66 H69/d67 H70/d68 H71/d69 H72/d70 H73/d71 H74/d72 H75/d73 H76/d74 H77/d75 H78/d76 H79/d77 H80/d78 H81/d79 H82/d80 H83/d81 H84/d82 H85/d83 H86/d84 H87/d85 H88/d86 H89/d87 H90/d88 H91/d89 H92/d90 H93/d91 H94/d92 H95/d93 H96/d94 H97/d95 H98/d96 H99/d97 H100/d98			
Allgemeine Anmerkungen / General tolerances			
ebmpapst ebm-papst St. Georgen GmbH & Co. KG		Zeich.-Nr./Drawing-No.: Formel/Size: Material: Maßstab/Scale:	