

Product Data Sheet RG225-55/18/2TDMO

**ebmpapst**

The engineer's choice



## RG225-55/18/2TDMO

## INDEX

<b>1</b>	<b>General</b> .....	<b>3</b>
<b>2</b>	<b>Mechanics</b> .....	<b>3</b>
2.1	General.....	3
2.2	Connections.....	3
<b>3</b>	<b>Operating Data</b> .....	<b>5</b>
3.1	Electrical Interface - Input.....	5
3.2	Electrical Operating Data .....	7
3.3	Electrical Interface - Output.....	8
3.4	Electrical Features .....	8
3.5	Data According ErP Directive .....	9
3.6	Aerodynamics.....	10
3.7	Sound Data.....	12
<b>4</b>	<b>Environment</b> .....	<b>12</b>
4.1	General.....	12
4.2	Climatic Requirements .....	12
4.3	Mechanical Requirements.....	12
<b>5</b>	<b>Safety</b> .....	<b>14</b>
5.1	Electrical Safety .....	14
5.2	Approval Tests.....	14
<b>6</b>	<b>Reliability</b> .....	<b>14</b>
6.1	General.....	14

## 1 General

Fan type	Blower	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air in axially, Air out radially	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


## 2 Mechanics

### 2.1 General

Width	270 mm	
Height	270 mm	
Depth	119 mm	
Mass	1,742 kg	
Housing material	Plastic	
Impeller material	Plastic	

### 2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 350 mm	
Tolerance	+/- 10,0 mm	
Tube length	S = 35 mm	
Tolerance	+/- 5,0 mm	

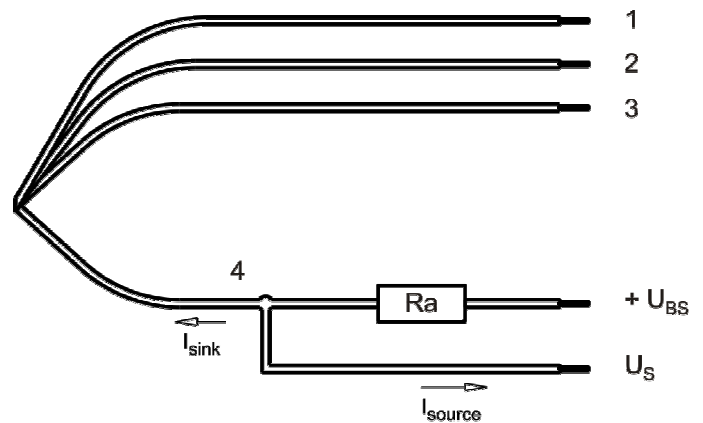

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 20	2,05 mm
2	blue	- GND	AWG 20	2,05 mm
3	violet	CONTR	AWG 22	1,30 mm
4	white	Tacho	AWG 22	1,30 mm

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

Litzen 1 - 2: AWG20

Litzen 3 - 4: AWG22 (Isolationsdurchmesser 1,35mm)

Lead wire 1 - 2: AWG20

Lead wire 3 - 4: AWG22 (Insulation diameter 1,35mm)

### 3 Operating Data



#### 3.1 Electrical Interface - Input

Control input	Analog
---------------	--------


#### Features

PWM - Frequency	1 kHz - 10 kHz typical: 2 kHz
Input voltage range	0 V - 10 V

#### Characteristics

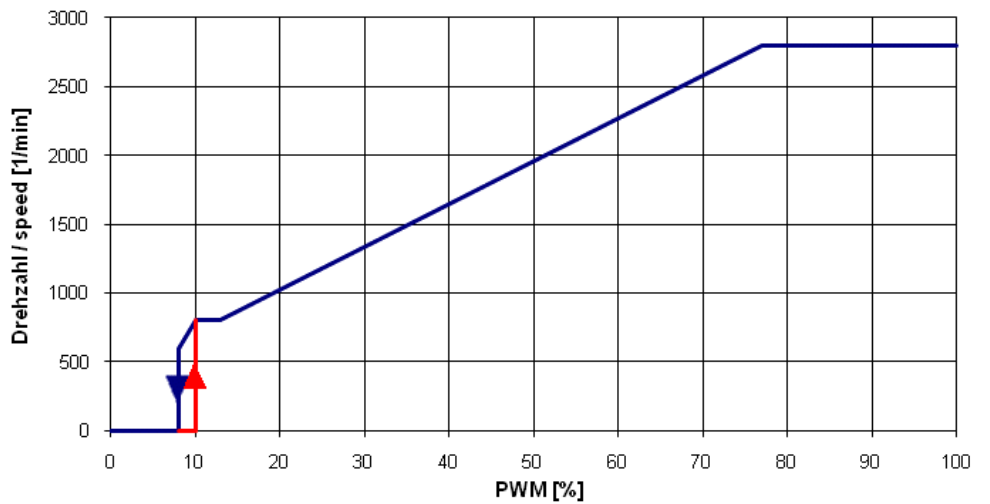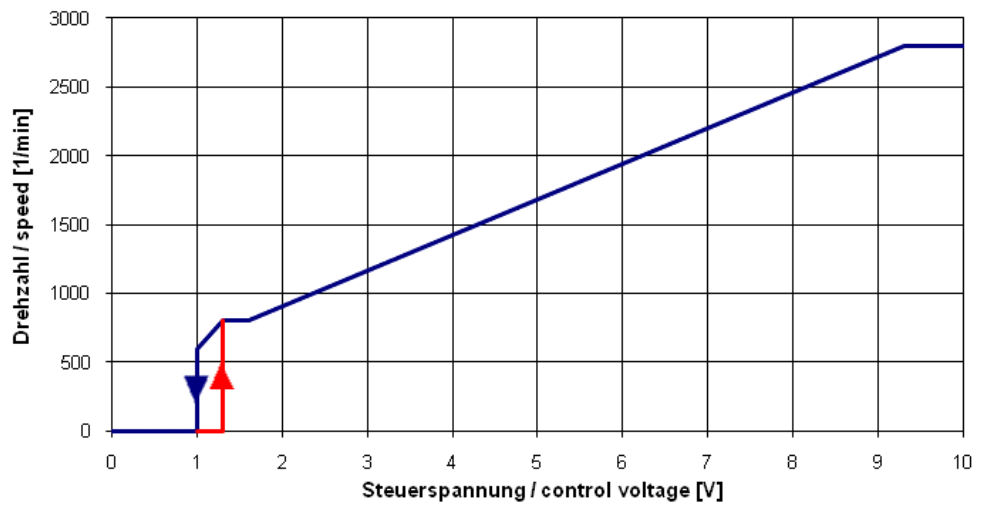

Schematics

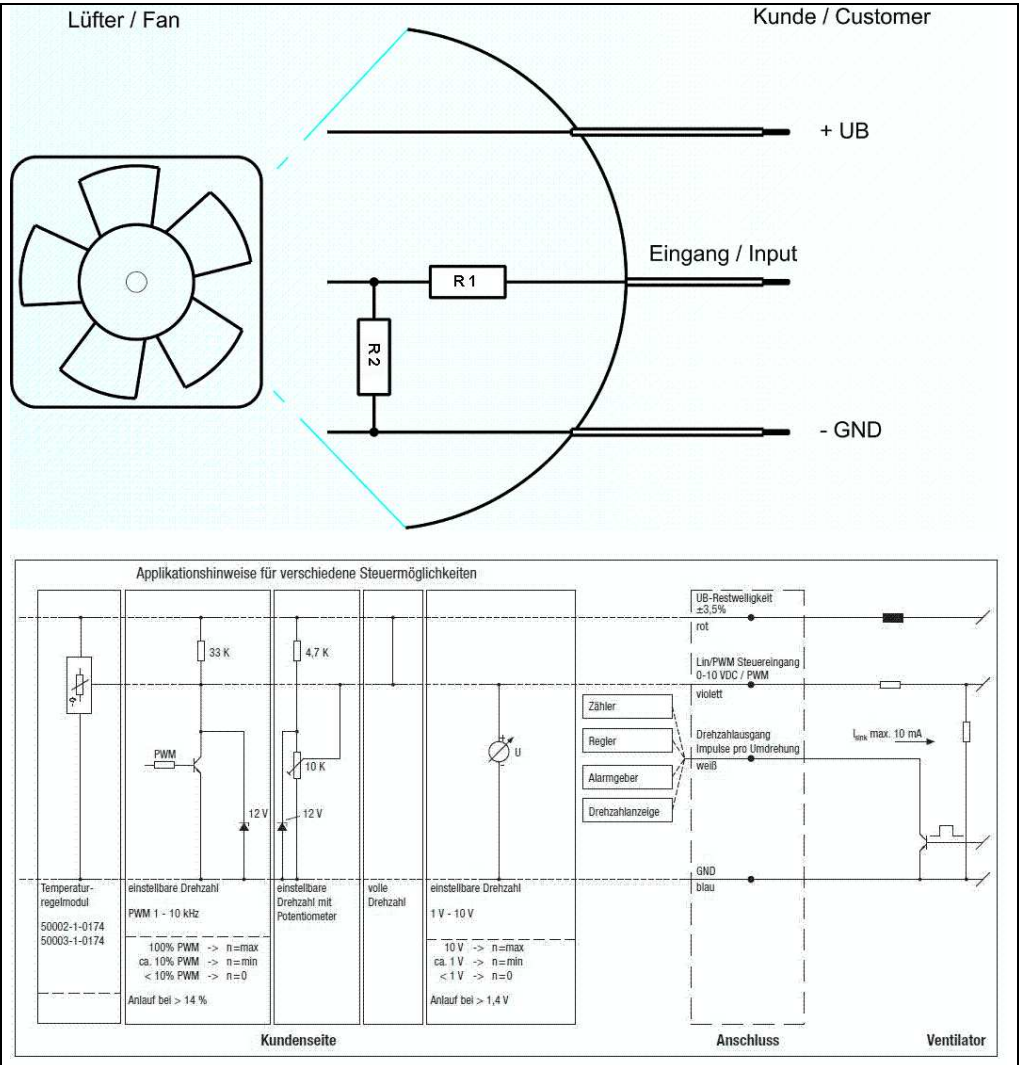

**Input voltage divider:**

R1 = 47 kOhm

R2 = 36 kOhm

For protection: There is parallel to R2 a 5,1 V Z-Diode

**Speed control:**

By pulse-width modulation (PWM) 0 ... 100%  
 with switching transistor in emitter circuit and collector resistance to 12 V  
 Frequency = 2 kHz (1 - 10 kHz)

**Information to the curve PWM:**

- 0% - <10% PWM: 0 1/min
- 10% PWM: 800 1/min (Fan on, coming from 0% PWM)
- 10% - 13% PWM: 800 1/min (corresponding to min. speed)
- 13% - 78% PWM: linear increasing curve
- 78% - 100% PWM: 2800 1/min (corresponding to max. speed)
- 10% - >8% PWM: linear decreasing curve (coming from 100% PWM)
- 8% PWM: 600 1/min or 0 1/min (Fan off, coming from 100% PWM)

oder:

**Speed control:**

By analog voltage 0 - 10 V

**Information to the curve analog:**

0 V - < 1,3 V: 0 1/min  
 1,3 V: 800 1/min (Fan on, coming from von 0 V)  
 1,3 V - 1,6 V: 800 1/min (corresponding to min. speed)  
 1,6 V - 9,4 V: linear increasing curve  
 9,4 V - 10 V: 2800 1/min (corresponding to max. speed)  
 1,3 V - > 1,0 V: linear decreasing curve (coming from 10 V)  
 1,0 V: 600 1/min or 0 1/min (Fan off, coming from 10 V)

All values are measured in the housing!

Fan doesn't have a sensor break detection!

**3.2 Electrical Operating Data**

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.


$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
 I: corresp. to arithm. mean current value

Name	Condition
U Contr. 0001	U Contr.: 10 V

Features	Condition	Symbol	Values		
Voltage range		U	36 V		72 V
Nominal voltage		U <sub>N</sub>		48 V	
Power consumption	$\Delta p = 0$	P	103 W	115 W	126 W
Tolerance	U Contr. 0010		+/- 10 %	+/- 10,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	2.850 mA	2.500 mA	1.750 mA
Tolerance	U Contr. 0010		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	2.650 1/min	2.800 1/min	2.800 1/min
Tolerance	U Contr. 0010		+/- 10,0 %	+/- 5,0 %	+/- 5,0 %

### 3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------

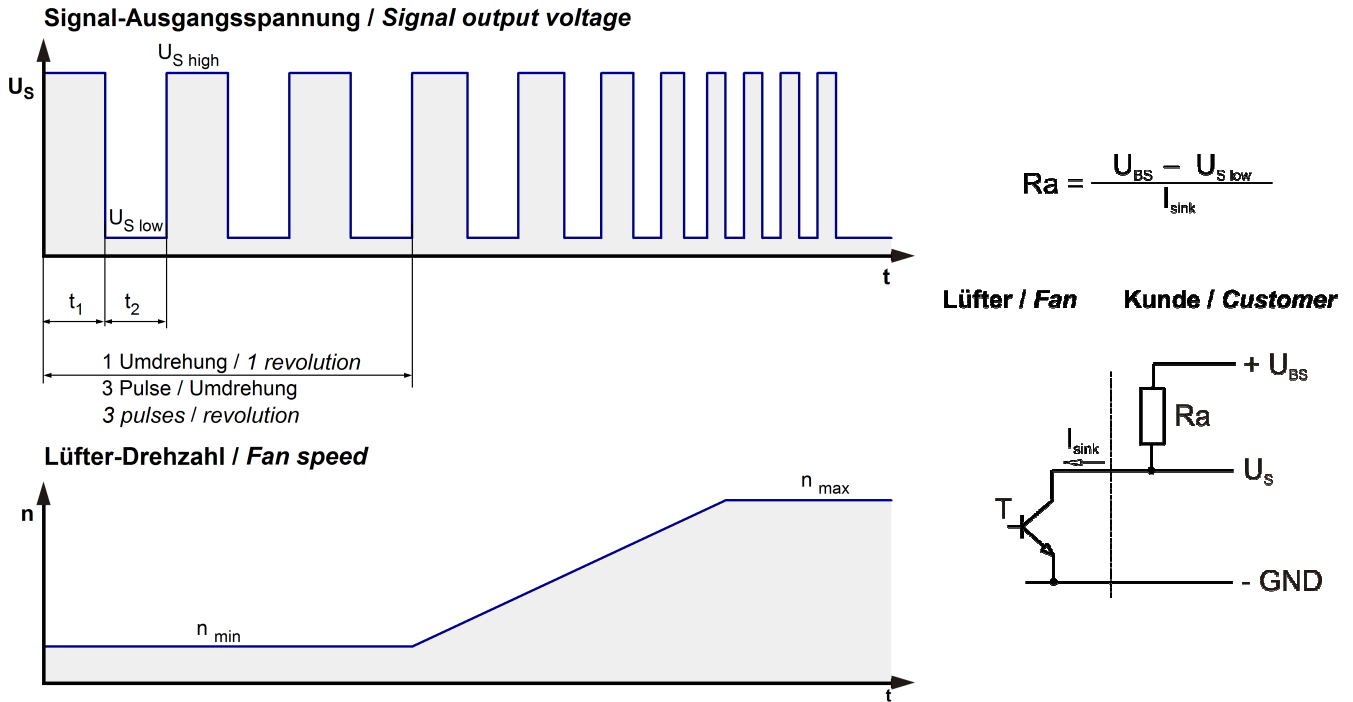

Features	Note	Values
Tacho operating voltage	$U_{BS}$	$\leq 60,0\ V$
Tacho signal Low	$U_{S\ low}$	$\leq 0,4\ V$
Tacho signal High	$U_{S\ high}$	$\leq 60,0\ V$
Maximum sink current	$I_{sink}$	$\leq 20\ mA$
Maximum source current		$0\ mA$
External resistor	External resistor $R_a$ from $U_{BS}$ to $U_S$ required. All voltages measured to GND.	
Tacho frequency	$(3 \times n) / 60$	$140\ Hz$
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5\ V/\mu s$

$n$  = revolutions per minute (1/min)

**Please note:**


At zero speed the tacho signal is at a static HIGH. It will be also HIGH when the fan is still spinning, but the speed control signal is set to zero speed already.  
 The tacho signal is only activated after the start-up is completed.

### 3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	P-CH FET	



Max. residual current at $U_N$	$I_F \leq 5 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at $U_N$	$I_{\text{block}}$ approx. 2.800 mA	
Clock signal at locked rotor	$t_3 / t_4$ typical: 4 s / 10,0 s	

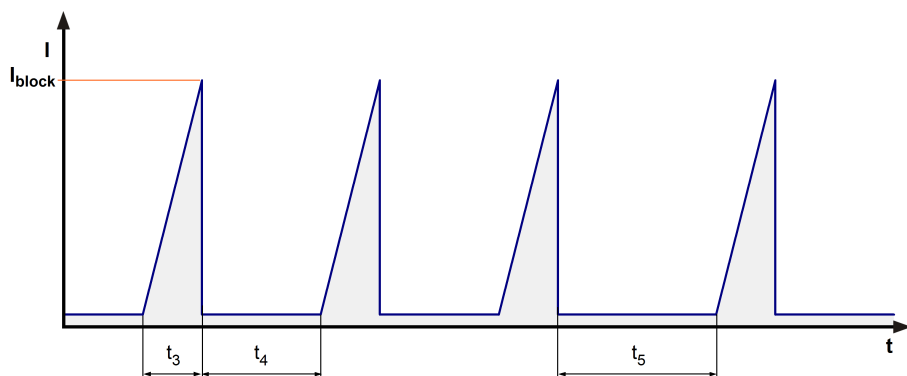

**Locked rotor signal t5:**

**After 2 failed start-ups there is an extended timeout of 50,0s.**

### 3.5 Data According ErP Directive

Installation / Efficiency category	A / static
Speed control	integrated
Specific ratio	1,00403
Target overall efficiency 2015	42,3 %
Overall efficiency	51,4 %
Efficiency grade	61
Power input	166,1 W
Speed	2.810 1/min

All values measured in optimum energy efficiency point.

Productiondatecode is printed on the fan label.

### 3.6 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.


Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;

In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

2.800 1/min at free air flow	U Contr. 10 V		
Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )		1.240 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ )		580 Pa	

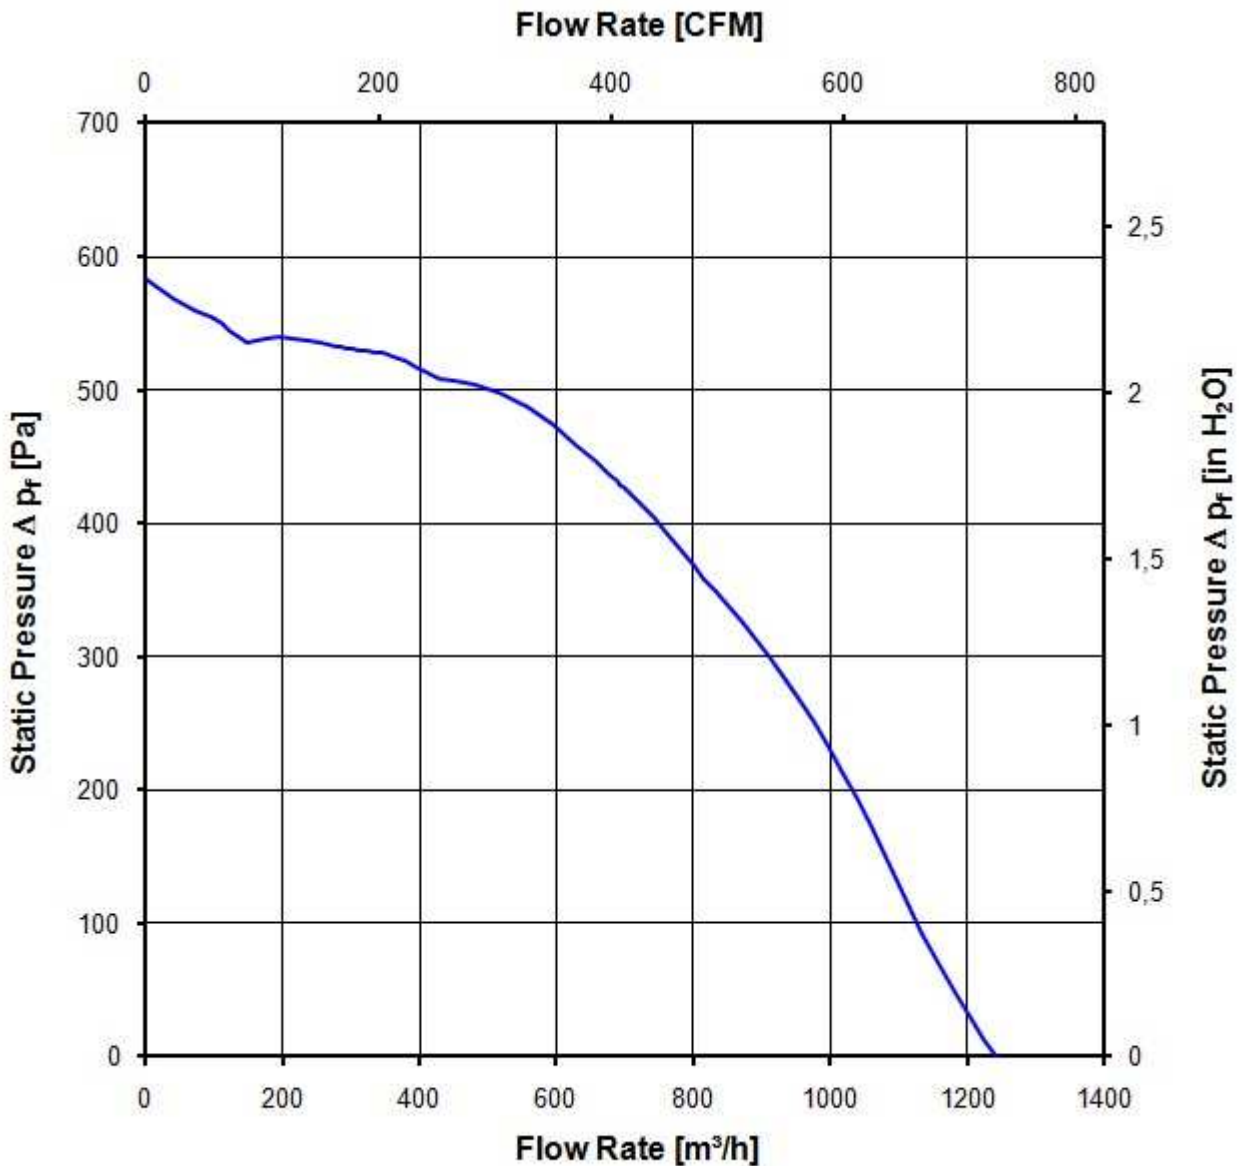



### 3.7 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

2.800 1/min at free air flow	U Contr. 10 V		
Optimal operating point	80,0 m <sup>3</sup> /h @ 505 Pa		
Sound power level at the optimal operating point	8,2 bel(A)		
Sound pressure level at free air flow, measured in rubber bands			

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	55 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

### 4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

### 4.3 Mechanical Requirements

severity level	Vibration (sinusoidal)	
0,5 G	Vibration (sinusoidal) in use IEC 60068-2-6 Displacement / frequency range Acceleration / frequency range Sweep rate Sweep cycles Duration	Vibration (sinusoidal) 0,035 mm / 10-60, 60-10 Hz 0,5 G / 60-500-60 Hz 1 Oct./min 10 2 hrs.

Axes of vibration	3
-------------------	---

severity level	stationary use		
1	storage / transportation	Random vibration not in use IEC 60068-2-64 Frequency range / ASD  $G_{RMS}$ Axes of vibration Test duration	Random vibration 5 - 20 Hz : $1,0 \text{ m}^2 / \text{s}^3$ 20 - 500 Hz : - 3 dB / Oct 0,91 G 3 3 x 5 h
	storage / transportation	Bump not in use IEC 60068-2-29 Shock spectrum Acceleration Duration Number of bumps (+X, -X, -Y, +Y, -Z, +Z) Total bumps	Bump half sine 18 G 6 ms 100 in each direction 600
	stationary use	Random vibration in use IEC 60068-2-64 Frequency range / ASD  $G_{RMS}$ Axes of vibration Test duration	Random vibration 5 - 20 Hz : $2,0 \text{ m}^2 / \text{s}^3$ 20- 150 Hz : - 3 dB / Oct 0,83 G 3 3 x 5 h
	stationary use	Bump in use IEC 60068-2-29 Shock spectrum Acceleration Duration Number of bumps (+X, -X, -Y, +Y, -Z, +Z) Total bumps	Bump half sine 5 G 11 ms 100 in each direction 600

**Note:**

Mounting the fan on upper housing part might cause an increase in noise due to resonances if external excitation above 45 Hz is present.

**5 Safety**

**5.1 Electrical Safety**

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	1000 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1700 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	I	

**5.2 Approval Tests**


CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

**6 Reliability**

**6.1 General**

--	--	--

Skizzenwerk nach DIN ISO 15018/1818 beachten!  
Refer to production notes DIN 15018/1818!  
Kopieren Sie diese Zeichnung, und geben Sie anderen und geben Sie die Nutzung der Konstruktion der Konstruktion, die  
Forderungen ohne schriftliche Genehmigung. Änderungen sind durch die Zeichnung zu vermeiden. Alle Rechte sind vorbehalten.  
In the event of the grant of a patent or the registration of a utility model or design.

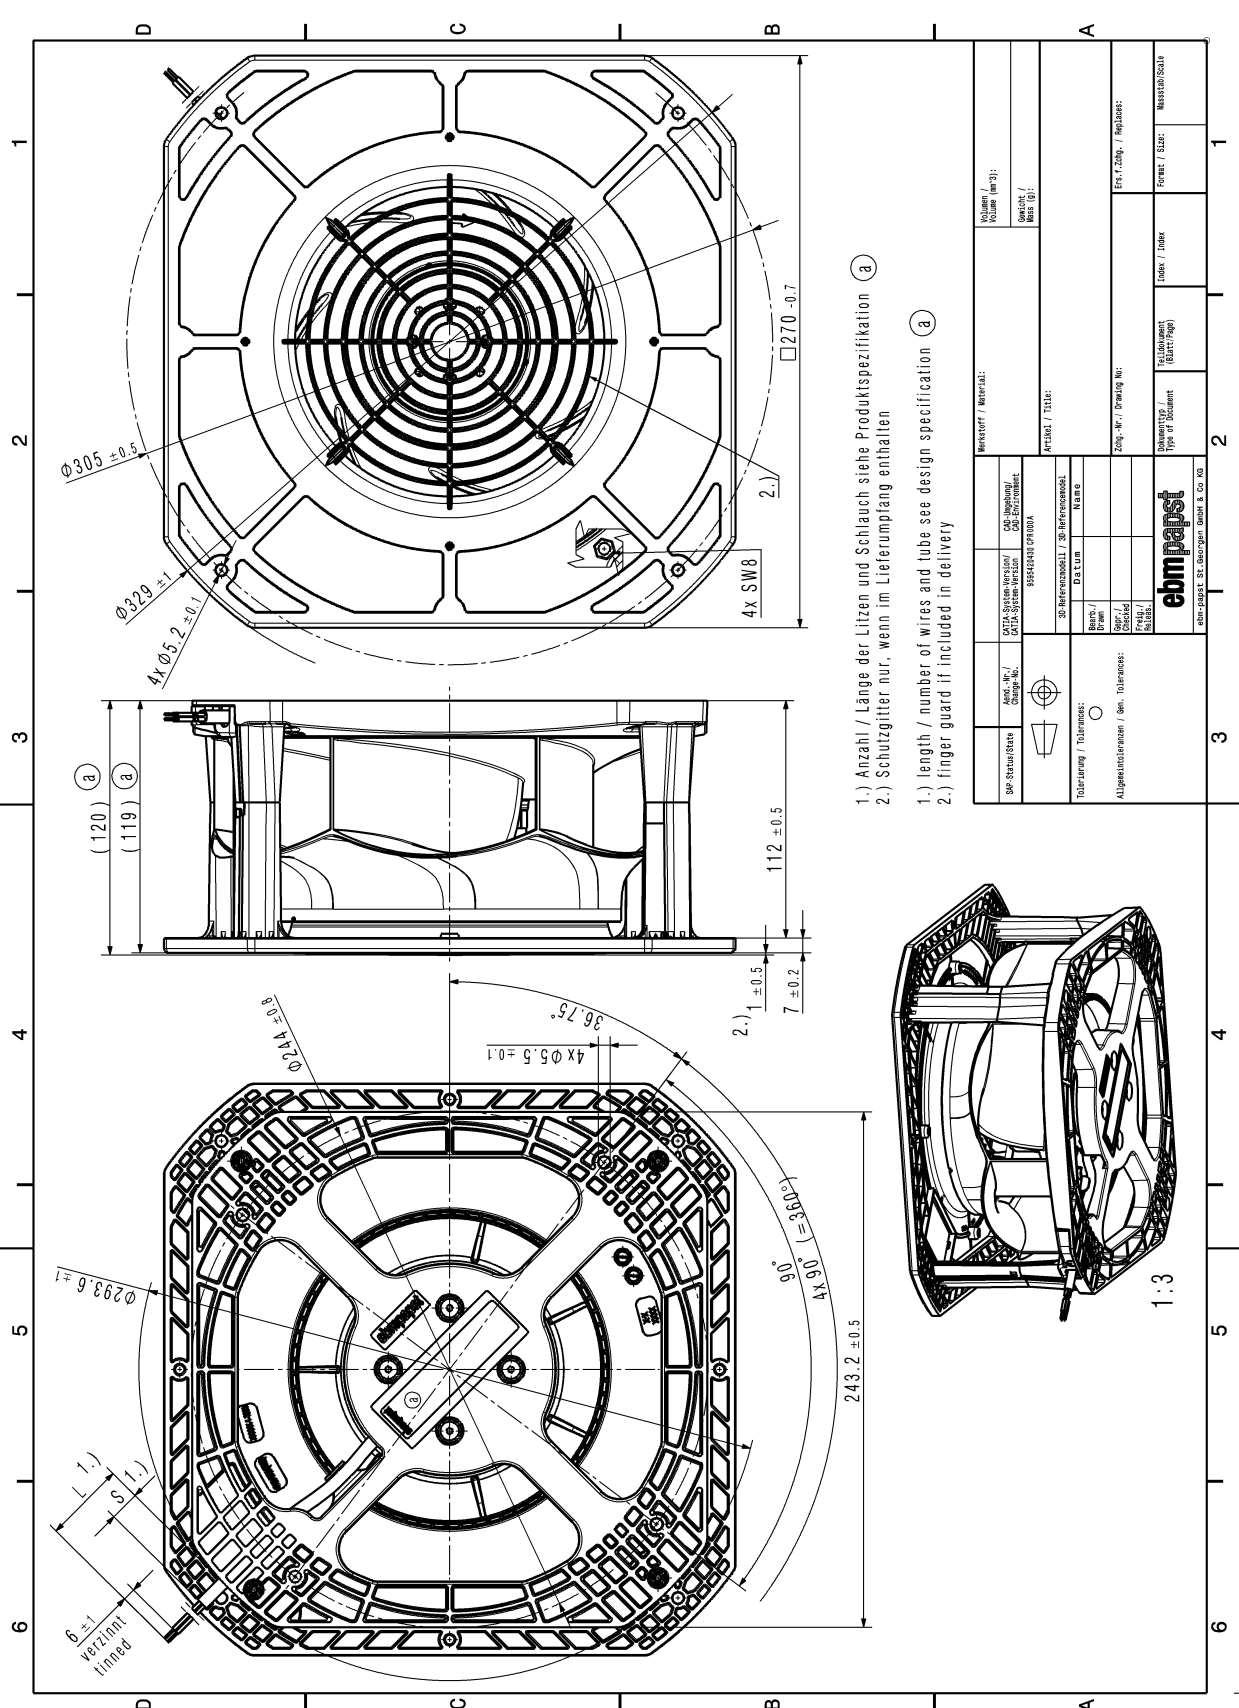

- 1.) Anzahl / Länge der Litzen und Schlauch siehe Produktspezifikation **a**
- 2.) Schutzgitter nur, wenn im Lieferumhang enthalten
- 1.) length / number of wires and tube see design specification **a**
- 2.) finger guard if included in delivery

