

Product Data Sheet 634/2HHA

**ebmpapst**

The engineer's choice



634/2HHA

## INDEX

<b>1</b>	<b>General</b> .....	<b>3</b>
<b>2</b>	<b>Mechanics</b> .....	<b>3</b>
2.1	General.....	3
2.2	Connections.....	3
<b>3</b>	<b>Operating Data</b> .....	<b>4</b>
3.1	Electrical Interface - Input.....	4
3.2	Electrical Operating Data .....	5
3.3	Electrical Interface - Output.....	6
3.4	Electrical Features .....	6
3.5	Aerodynamics.....	12
3.6	Sound Data.....	13
<b>4</b>	<b>Environment</b> .....	<b>13</b>
4.1	General.....	13
4.2	Climatic Requirements .....	13
<b>5</b>	<b>Safety</b> .....	<b>14</b>
5.1	Electrical Safety .....	14
5.2	Approval Tests.....	14
<b>6</b>	<b>Reliability</b> .....	<b>14</b>
6.1	General.....	14

## 1 General

Fan type	Fan	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Stainless steel bearing	
Mounting position - shaft	Any	


## 2 Mechanics

### 2.1 General

Width	60,0 mm	
Height	60,0 mm	
Depth	25,4 mm	
Mass	0,070 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 30 Ncm Remaining corners: 70 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

### 2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 310 mm	
Tolerance	+ - 10,0 mm	

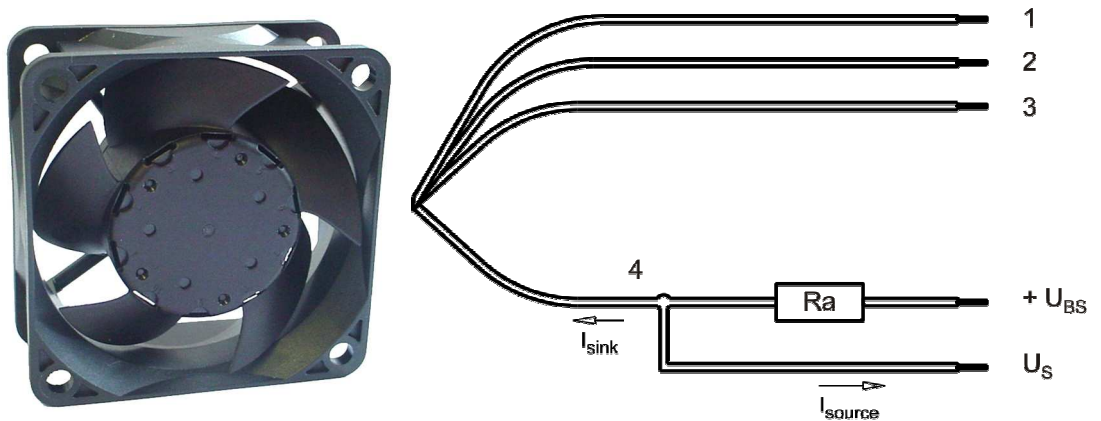

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 24	1,10 mm
2	blue	- GND	AWG 24	1,10 mm
3	violet	CONTR	AWG 24	1,10 mm
4	white	Tacho		

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.


### 3 Operating Data

#### 3.1 Electrical Interface - Input

Control input	Analog
---------------	--------

#### Features

Input voltage range	0 V - 10 V
---------------------	------------

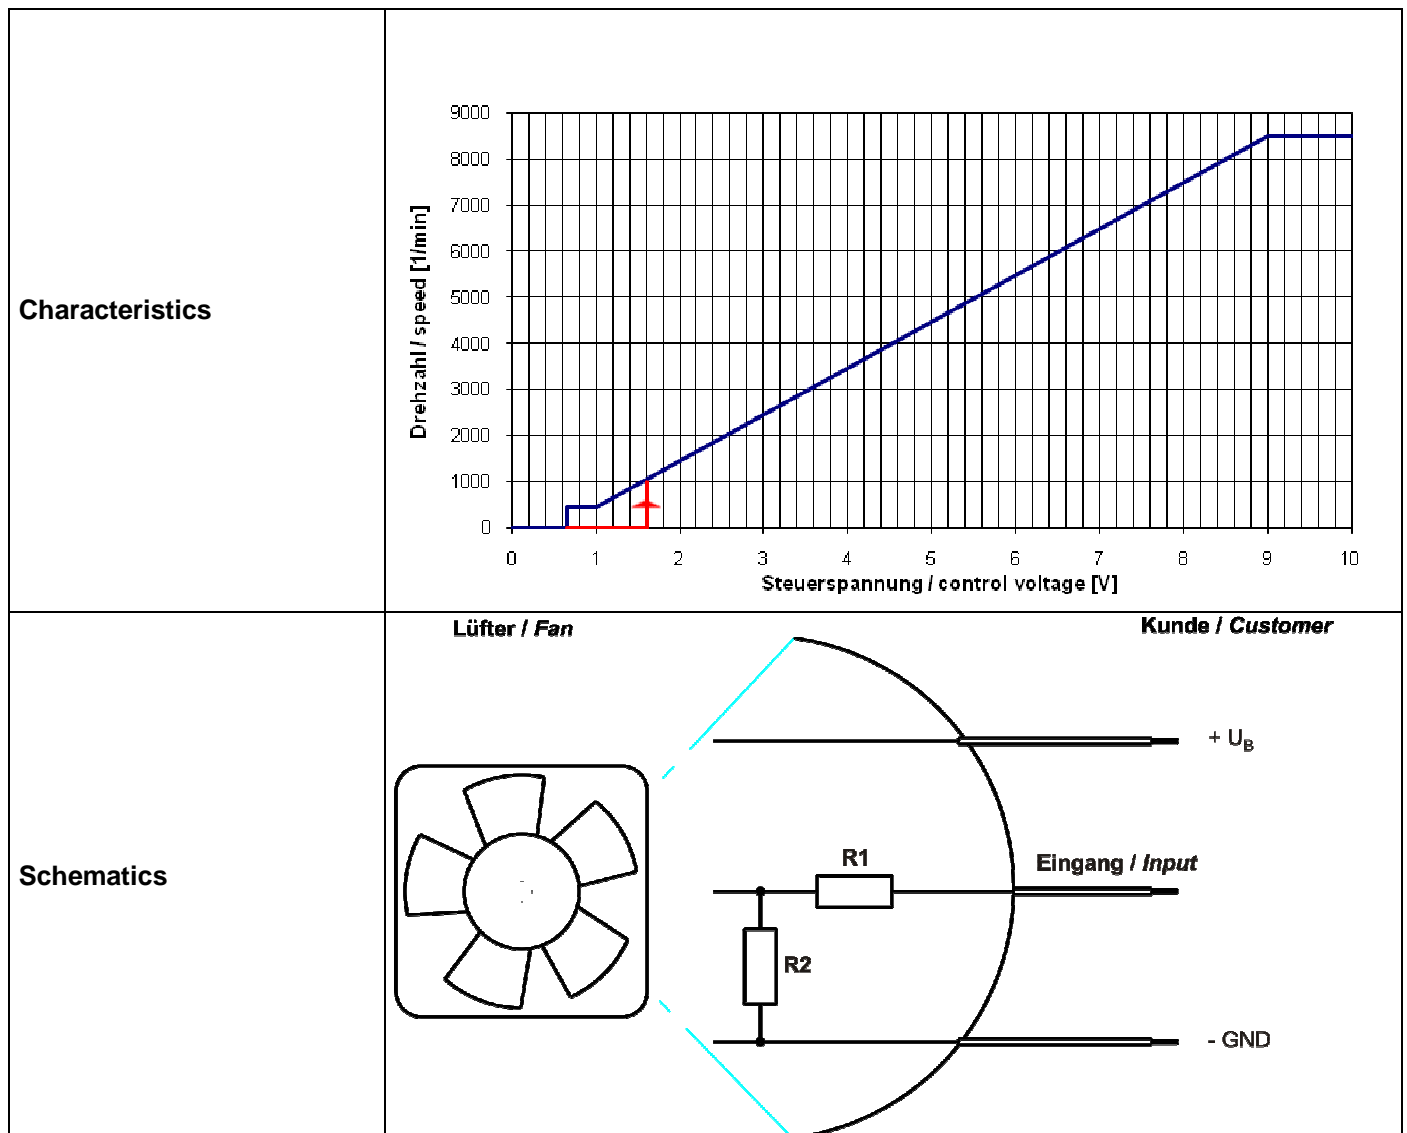

#### Startup condition

To ensure a reliable starting, a control voltage of 1.6 V is necessary for at least 5s. The startup speed is 1000rpm. After startup the entire characteristic range from 450rpm to 8500rpm is available.

#### Control voltage conditions

For a steady speed curve an uninterruptible setpoint voltage is required.

### 3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
 I: corresp. to arithm. mean current value

Name	Condition
U Contr. 0001	U Contr.: $\geq 9,0$ V

Startup condition

To ensure a reliable starting, a control voltage of 1.6 V is necessary for at least 5s. The startup speed is 1000rpm. After startup the entire characteristic range from 450rpm to 8500rpm is available.

Startup peakpulse current:  $I_{pmax} \leq 800$  mA

Startup peakpulse duration:  $t_p = 6 \times 350$  us (See osz-picture under "Dokumentdaten"!)

Features	Condition	Symbol	Values		
			18 V	24 V	28 V
Voltage range		U	18 V	24 V	28 V
Nominal voltage		$U_N$		24 V	
Power consumption	$\Delta p = 0$	P	1,8 W	3,2 W	3,4 W
Tolerance	U Contr. 0010		+/- 17,5 %	+/- 17,5 %	+/- 17,5 %
Current consumption	$\Delta p = 0$	I	100 mA	135 mA	120 mA
Tolerance	U Contr. 0010		+/- 17,5 %	+/- 17,5 %	+/- 17,5 %
Speed	$\Delta p = 0$	n	6.750 1/min	8.500 1/min	8.500 1/min
Tolerance	U Contr. 0010		**)	**)	**)
Starting current consumption				$\leq 600$ mA	

### 3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------




Features	Note	Values
Tacho operating voltage	U <sub>BS</sub>	<= 60 V
Tacho signal Low	U <sub>S low</sub>	I sink: 2 mA <= 0,4 V
Tacho signal High	U <sub>S high</sub>	I source: 0 mA <=60 V
Maximum sink current	I <sub>sink</sub>	4 mA
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency	(2 x n) / 60	
Tacho isolated from motor	No	
Slew rate		=> 0,5 V/us

n = revolutions per minute (1/min)

### 3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at U <sub>N</sub>	I <sub>F</sub> <= 200 uA	
Locked rotor protection	Auto restart	
Locked rotor current at U <sub>N</sub>	I <sub>block</sub> approx. 600 mA	
Clock signal at locked rotor	t <sub>3</sub> / t <sub>4</sub> typical: 0,85 s / 11,5 s	

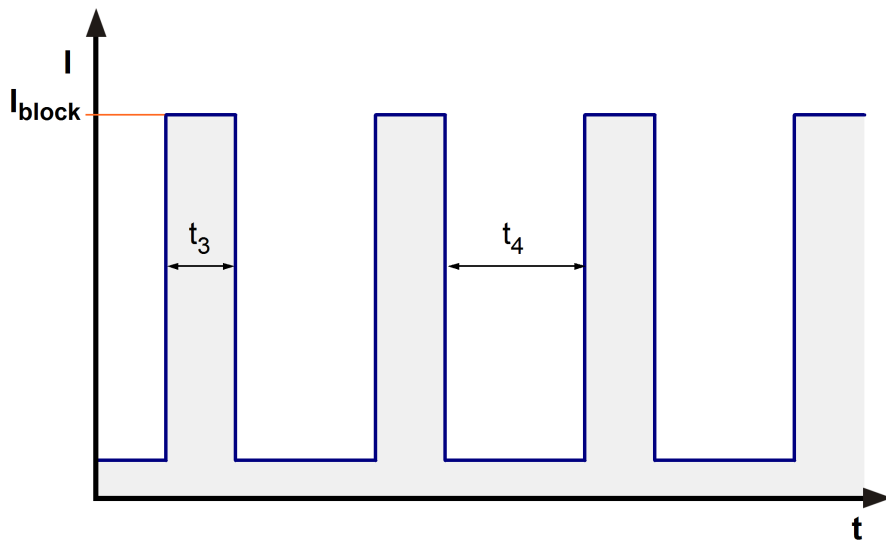

The fan has a special blocking cycle. The behavior of this cycle differs marginally between a blocked rotor when the fan gets started and a blocked rotor during the running operation of the fan. The following figures describe this characteristic.

1. Blocked rotor at the start of the fan








LeCroy  
2. Blocked rotor after the normal operation of the fan

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

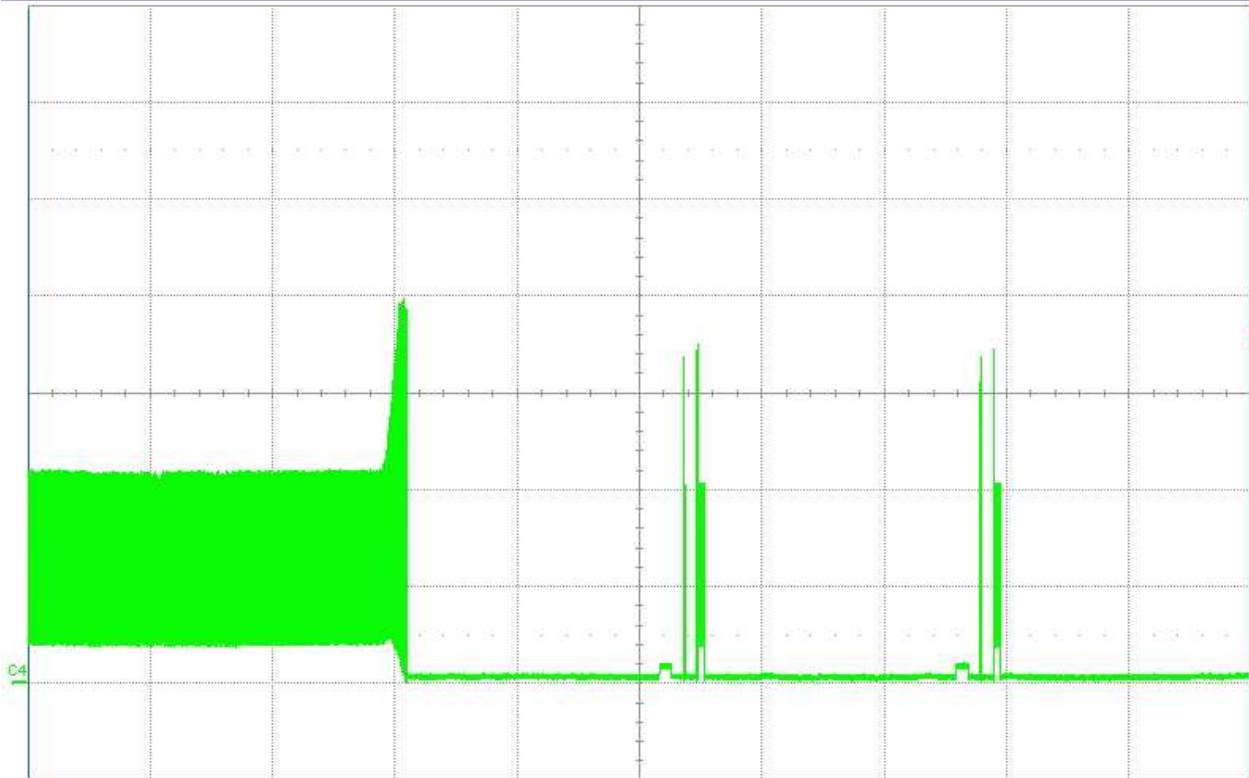

C4 F BWL DC  
100 mA/div  
-300.0 mA


LeCroy

Zeitbasis -10.0 s  
Roll 5.00 s/div  
1.00 MS 20 kS/s

Trigger C4 DC  
Stop 355 mA  
Edge Positiv

06.03.2014 15:41:08

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

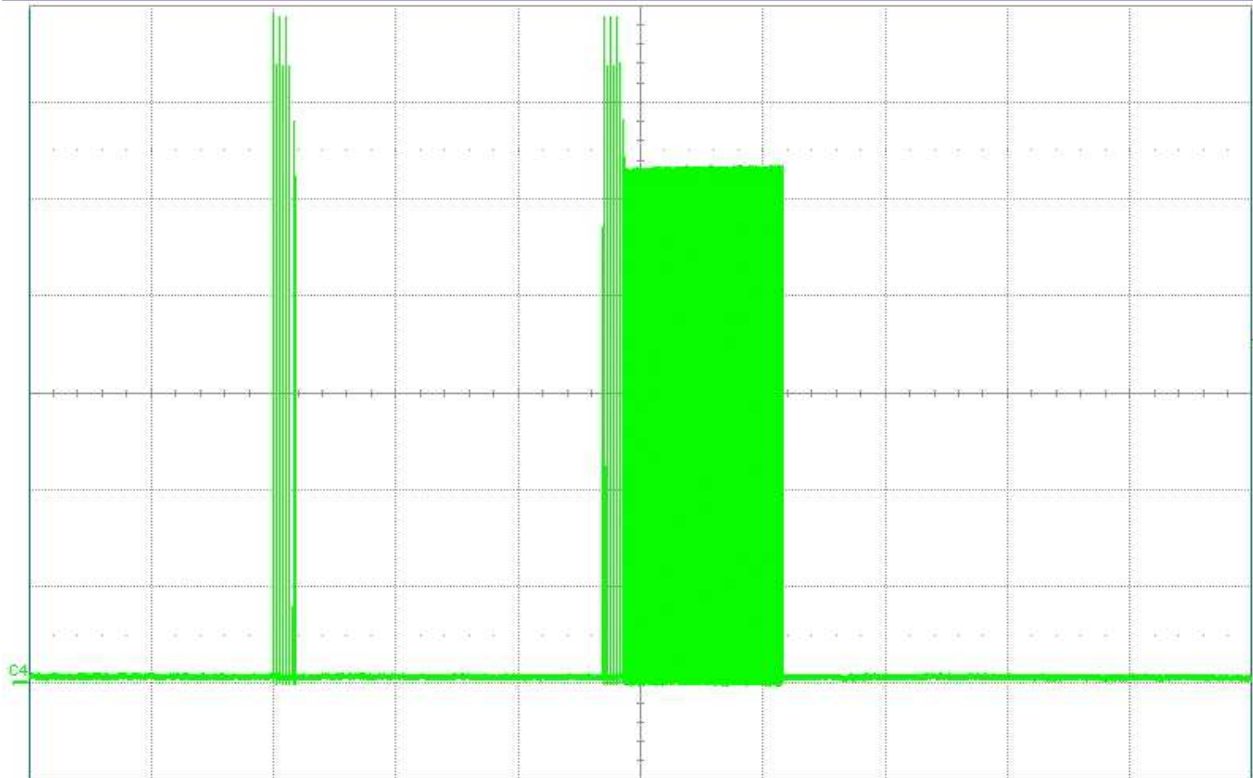

C4 F BwL DC  
100 mA/div  
-300.0 mA  
LeCroy

Zeitbasis -600 ms  
200 ms/div  
2.00 MS 1.0 MS/s  
Trigger C4 DC  
Stop 353 mA  
Edge Positiv  
06.03.2014 15:42:45

### 3.5 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.


Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;

In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

8.500 1/min at free air flow	U Contr. >= 9,0 V		
Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )		58,0 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ )		215 Pa	

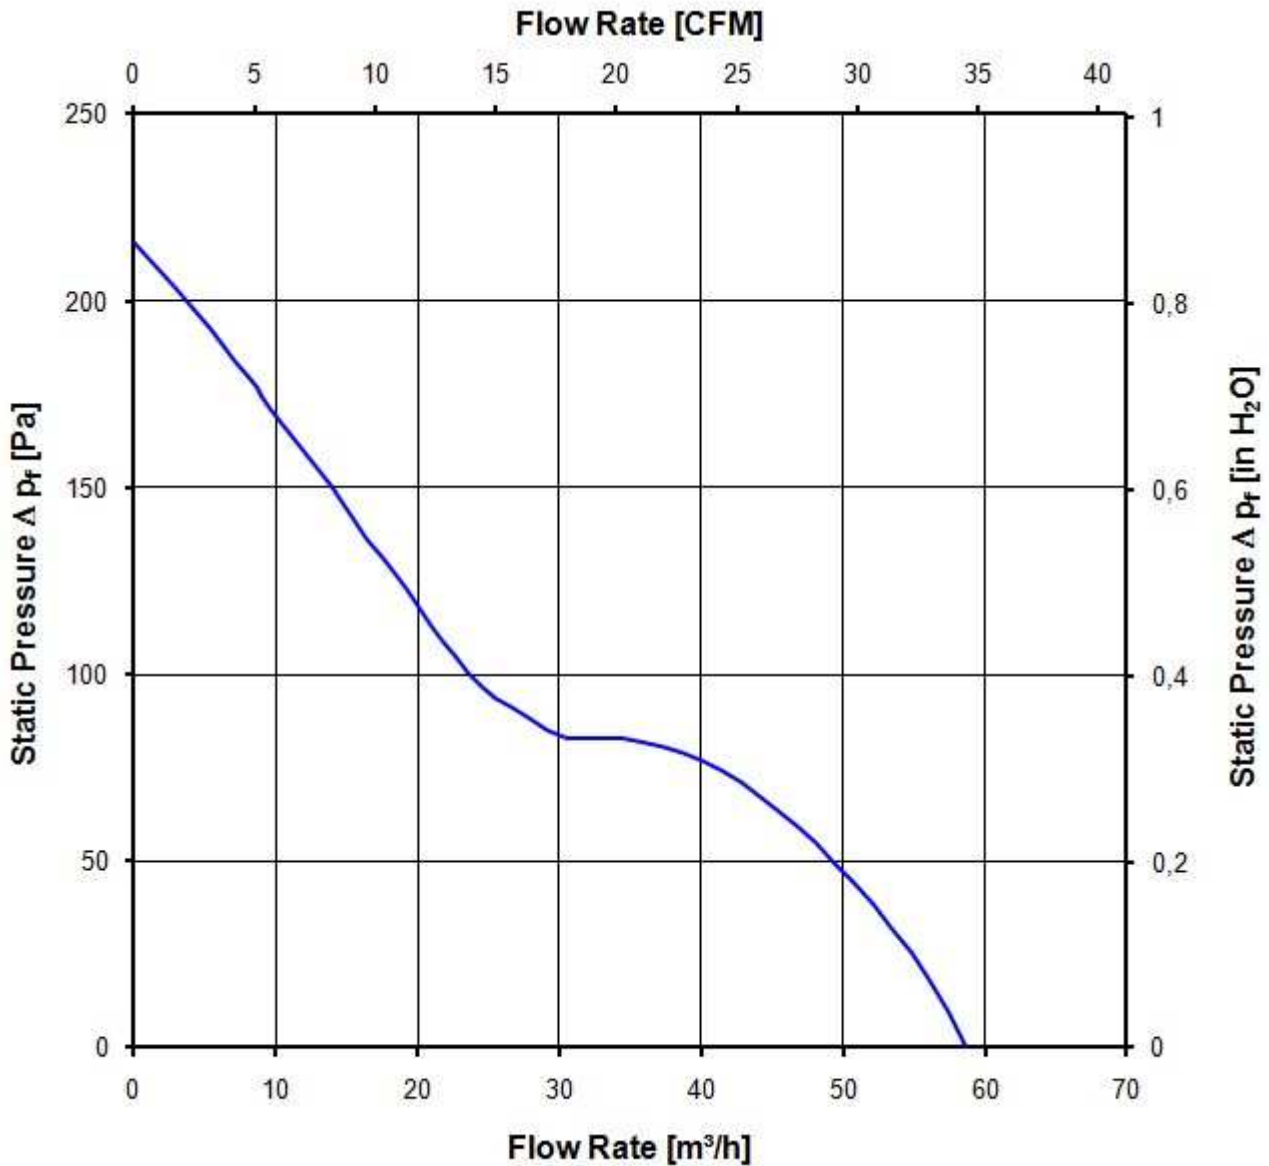

### 3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

8.500 1/min at free air flow	U Contr. $\geq 9,0 \text{ V}$		
------------------------------	-------------------------------	--	--

Optimal operating point	40,0 m <sup>3</sup> /h @ 69 Pa	
Sound power level at the optimal operating point	6,1 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	44,0 dB(A)	

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

### 4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments.

**5 Safety**

**5.1 Electrical Safety**

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	850 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

**5.2 Approval Tests**

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Not applicable

**6 Reliability**


**6.1 General**

Life expectancy L10 at TU = 40 °C	75.000 h	
Life expectancy L10 at TU max.	37.500 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	127.500 h	

Copying of this document, and giving it others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzmerk nach DIN ISO 16016 beachten !  
 Refer to protection notice DIN ISO 16016 !

Anzahl und Länge der Litzen siehe BV - Blatt 1  
 length and number of wires see design specification page 1

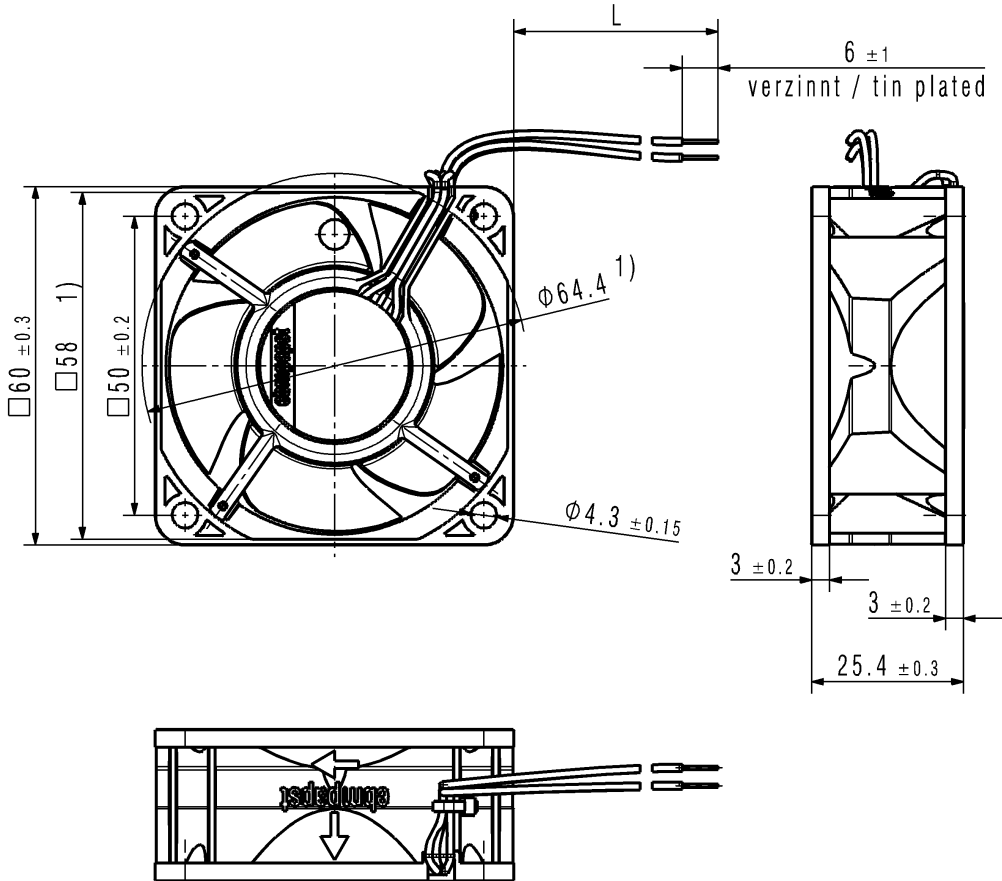

Axialspiel bei Kugellagerung (K): 0 ( mit Federausgleich)/  
 Axial clearance for ball bearing (K ):0 (with spring compensation)

1) Maße für Montagewand  
 1) measures for mounting plate

SAP-Status/State		Aend.-Nr./ Change-No.		CATIA-System-Version/ CAD-Umgebung/ CAD-System-Version/ CAD-Environment		Werkstoff / Material:		Volumen / Volume (mm <sup>3</sup> ):	
		9892300187 CPR000				Artikel / Title:		Gewicht / Mass (g):	
Tolerierung / Tolerances:		Datum		Name		Zchg.-Nr. / Drawing No:		Ers.f.Zchg. / Replaces:	
Allgemeintoleranzen / Gen. Tolerances:		Bearb./ Drawn				Dokumenttyp / Type of Document		Teildokument (Blatt/Page)	
		Gepr./ Checked				Index / Index		Format / Size:	
		Freig./ Released				ebmpapst		Massstab/Scale	
						ebm-papst St.Georgen GmbH & Co KG			